查询GBPC2502供应商

CE

CHENYI ELECTRONICS

GBPC25005 THRU GBPC2510

SINGLE PHASE SILICON PASSIVATED BRIDGE RECTIFIER

Voltage: 50 TO 1000V CURRENT:25A

FEATURES

Surge overload rating: 300A peak

Low profile design

1/4" Universal faston terminal

and ∅40ml lead--wire available

GBPC





MECHANICAL DATA

. **Polarity**: Polarity symbol marked on body

. **Mounting** : Hole thru #10 screw

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Single-phase, half-wave, 60HZ, resistive or inductive load rating at 25 ℃, unless otherwise stated,

for capacitive load, derate current by 20%)

	SYMBOL	GBPC 25005	GBPC 2501	GBPC 2502	GBPC 2504	GBPC 2506	GBPC 2508	GBPC 2510	units
Maximum Recurrent Peak Reverse Voltage	Vrrm	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	Vrms	35	70	140	280	420	560	700	V
Maximum DC blocking Voltage	Vdc	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified current 3/8" lead length at Ta=55 ℃	If(av)	25							A A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load	Ifsm	300							A
Maximum Instantaneous Forward Voltage at forward current 12.5A	Vf	1.1							V
Maximum DC Reverse Voltage Ta=25 ℃	Ir	10.0							μA
at rated DC blocking voltage Ta=100 ℃		500							μA
Operating Temperature Range	Tj	-55 to +175							℃
Storage and operation Junction Temperature	Tstg	-55 to +175							℃

Note: Suffix "W" for wire type

Copyright @ 2000 SHANGHAI CHENYI ELECTRONICS CO.,LTD

CE

CHENYI ELECTRONICS

GBPC25005 THRU GBPC2510

SINGLE PHASE SILICON PASSIVATED BRIDGE RECTIFIER

Voltage: 50 TO 1000V CURRENT:25A

RATINGS AND CHARACTERISTIC CURVES GBPC25005 THRU GBPC2510

FIG.1-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

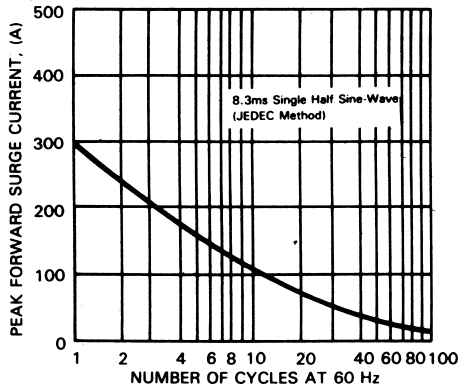

FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE

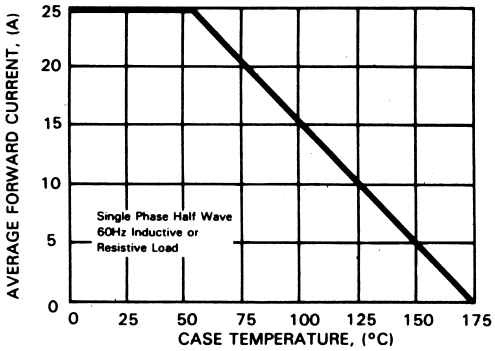

FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

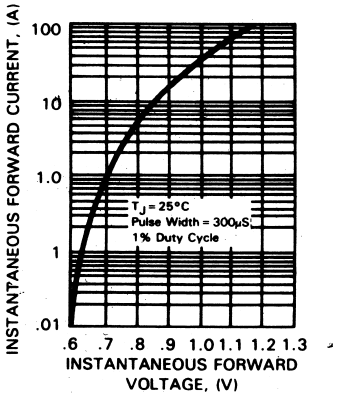

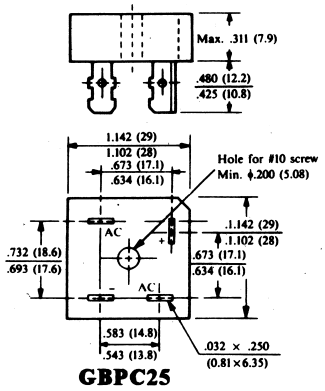

GBPC25

FIG.4-TYPICAL REVERSE CHARACTERISTICS

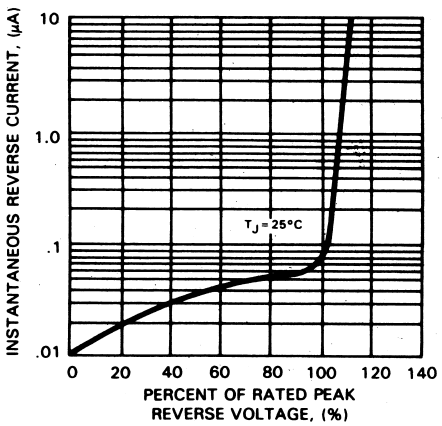

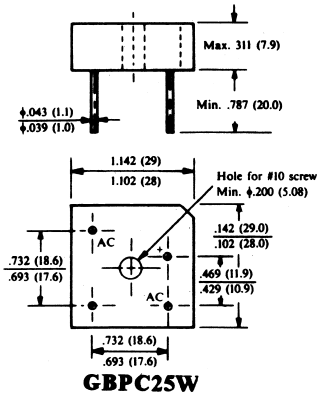

GBPC25W

Copyright @ 2000 SHANGHAI CHENYI ELECTRONICS CO.,LTD